

UTILITY  
PATENT APPLICATION  
TRANSMITTAL

(Only for new nonprovisional applications under 37 CFR 1.53(b))

Attorney Docket No.

P99,0372

First Named Inventor or Application Identifier

Yoshinori Kuno et al,

Express Mail Label No:

15525 U.S. PTO  
09/306813

66/40/50

ADDRESS TO: Assistant Commissioner for Patents  
Box Patent Application  
Washington, DC 20231

APPLICATION ELEMENTS

See MPEP chapter 600 concerning utility patent application contents.

1. ☒ Specification [Total Pages 22 ]
2. ☒ Drawing(s) (35USC 113) [Total Pages 3 ]
3. ☒ Declaration and Power of Attorney [Total Pages 2 ]
- a. ☒ Newly executed declaration (original copy)
- b. ☐ Copy from prior application (37CFR 1.63(d))  
(for continuation/divisional with Box 14 completed)
- [Note Box 4 Below]
- i. ☐ DELETION OF INVENTOR(S)  
Signed statement attached deleting  
inventor(s) named in the prior application,  
see 37 CFR 1.63(d)(2) and 1.33(b).
4. ☐ Incorporation By Reference (usable if Box 3b is checked)  
The entire disclosure of the prior application, from which a  
copy of the oath or declaration is supplied under Box 3b,  
is considered as being part of the disclosure of the  
accompanying application and is hereby incorporated by  
reference therein.

ACCOMPANYING APPLICATION PARTS

5. ☒ Assignment Papers (cover sheet & documentation)  
Sony Corporation
6. ☐ Letter under 37 CFR 1.41(c).
7. ☐ English Translation Document (if applicable)
8. ☐ Information Disclosure Statement (IDS)/PTO-1449 ☐ Copies of IDS Citations
9. ☒ Preliminary Amendment
10. ☒ Return Receipt Postcard (MPEP 503)  
(Should be specifically itemized)
11. ☐ Small Entity ☐ Statement filed in prior application,  
Statement(s) Status still proper and desired  
(Faxed copy of original)
12. ☒ Certified Copy of Priority Document(s) Japanese  
Application No. P10-128370 filed May 12, 1998
13. ☐ Other:

14. If a CONTINUING APPLICATION, check appropriate box and supply the requisite information:

☐ Continuation ☐ Divisional ☐ Continuation-in-part (CIP) ☐ of prior application No:    

CLAIMS AS FILED

(1) FOR	(2) NUMBER FILED	(3) NUMBER EXTRA	(4) RATE	(5) BASIC FEE \$760.00
TOTAL CLAIMS 20	3			
INDEPENDENT CLAIMS 3	3			
ANY MULTIPLE DEPENDENT CLAIMS? (YES (X) NO)				
			TOTAL FILING FEE ->	\$760.00

☒ The Commissioner is hereby authorized to charge any additional fees which may be required in connection with this application, or credit any overpayment to ACCOUNT NO. 08-2290. A duplicate copy of this sheet is enclosed.

☒ A check in the amount of \$ 760.00 to cover the filing fee is enclosed.

15. CORRESPONDENCE ADDRESS

HILL & SIMPSON

A Professional Corporation

233 South Wacker Drive - 85<sup>th</sup> Floor Sears Tower

Chicago, Illinois 60606

Telephone (312) 876-0200 - Fax (312) 876-0898

SIGNATURE:  
491:1190

DATE: May 6, 1999  
U-11

## SOLID STATE IMAGE PICKUP DEVICE

### BACKGROUND OF THE INVENTION

The present invention relates to a solid state image pickup device in which the charges obtained in a photoelectric converter portion are transferred to a charge/voltage converter portion by predetermined driving pulses, and converted into required voltages to output.

In general, a solid state image pickup device is provided with a row or a plurality of rows of photoelectric converter portions and the charges obtained there are transferred to a charge/voltage converter portion for outputting a voltage signal thus obtained.

The charges are transferred using predetermined clock pulses. The clock pulses necessary for transferring the charges are listed as follows;

(1) A readout-gate-pulse from the photoelectric converter portion to a CCD (Charge Coupled Device) register, (2) A transfer pulse for transferring the charges obtained in the photoelectric-converter portion to the charge/voltage converter portion, (3) A transfer pulse in the last stage right before the charge/voltage converter portion, and (4) A reset pulse in the charge/voltage converter portion.

In a case, these clock pulses are supplied from an

external apparatus, or in another case that only a certain kind of clock pulse is supplied from an external apparatus and the other clock pulses necessary for transferring the charges are generated by a timing generator and a driver inside the device.

However, in a solid state image pickup device as mentioned in the above, in a case where a user wants to drive the device at a different timing within the conditions allowed to use the solid state sensor device, or in another case where a user wants to use only a part of the plurality of photoelectric converter portions, sometimes the revision of an external circuit is needed by supplying clock pulses thereto, or an influence of a signal supplied from an external apparatus may exert on the clock pulses generated by an internal timing generator.

Besides, in the case where a user wants to use only a part of the plurality of photoelectric converter portions, the clock pulses from an external apparatus intended to supply only to a part of the portions can be delivered to all pixels in the photoelectric converter portion, and in particular in a case where high speed transfer is needed, since the load capacity of the transfer pulses becomes as much as the load capacity for all CCD registers, a physical restriction can be produced.

## SUMMARY OF THE INVENTION

It is an object of the present invention to provide a solid state image pickup device for solving the abovementioned problem.

In order to achieve the object described in the above, according to an aspect of the present invention, there is provided a solid state image pickup device being provided with a photoelectric converter portion being composed of a plurality of pixels disposed in a row, a charge transfer portion for transferring the charges generated in the photoelectric converter portion with predetermined driving pulses, and a charge/voltage converter portion for converting the charges transferred by the charge transfer portion into voltages, comprising; a timing pulse generator portion for generating at least more than one pulse signal from among the following pulse signals: a first pulse signal for driving the charge transfer portion, a second pulse signal for reading out the charges generated in the photoelectric converter portion, a third pulse signal for sweeping out the charges generated in the photoelectric converter portion and a fourth pulse signal for discharging the charges transferred to the charge/voltage converter portion, and a switch circuit for switching over at least a pulse signal out of the abovementioned pulse signals to a

predetermined fixed potential or a floating level, or vice versa.

According to another aspect of the present invention, there is provided a driving method for a solid state image pickup device being provided with a photoelectric converter portion being composed of a plurality of pixels disposed in a row, a charge transfer portion for transferring the charges generated in the photoelectric converter portion and a charge/voltage converter portion for converting the charges transferred by the charge transfer portion into corresponding voltages, wherein in a first mode, a first pulse signal for driving the charge transfer portion, a second pulse signal for reading out the charges generated in the photoelectric converter portion, a third pulse signal for sweeping out the charges generated in the photoelectric converter portion and a fourth pulse signal for discharging the charges transferred to the charge/voltage converter portion are supplied to the solid state image pickup device, and in a second mode, at least one pulse signal out of the signal pulses, the first, the second, the third or the fourth, is changed over to a predetermined fixed potential or a floating level.

According to a further aspect of the present invention, there is provided a driving method for a solid

state image pickup device being provided with a plurality of photoelectric converter portions being composed of a plurality of pixels in a row, and a plurality of charge transfer portions for transferring the charges generated in respective pixels disposed in a row in the plurality of photoelectric converter portions with predetermined driving pulses, wherein in a first mode, the driving pulses are supplied to all of the plurality of the charge transfer portions, and in a second mode, the driving pulses to be supplied to at least one charge transfer portion out of the plurality of charge transfer portions are switched over to a predetermined fixed potential or a floating level.

Consequently, a solid state image pickup device according to the present invention has effects as shown in the following. In a case where a user wants to drive the device with a timing different from the present one using ordinary driving pulses, the ordinary driving pulses can be easily switched over to a predetermined fixed potential or a floating level with a switch circuit, which makes it possible to operate the device accurately at a different timing from the present one. Further, it is made possible to suspend the operation of an unnecessary pulse signal, while making it possible to control the generation of noise whose pulse signal

overlaps on the output waveform.

Further, it is made possible to lower the power consumption in suspending the driver operation by fixing unnecessary pulse signals at a predetermined potential. Even in a case where only a part of the plurality of photoelectric converter portions are used, the pulse signals to be used for the unused photoelectric converter portions are suspended, so that the load capacity of the charge transfer portion can be lowered, thereby making it possible to correspond to a high speed transfer operation.

#### BRIEF DESCRIPTION OF THE DRAWINGS

Fig. 1 shows a block diagram for explaining a solid state image pickup device according to a first embodiment;

Figs. 2A and 2B show the circuit diagrams for explaining a switch circuit:

Fig. 3 shows a timing chart of input and output pulses in the switch circuit;

Fig. 4 shows a block diagram for explaining the solid state image pickup device according to a second embodiment.

#### DESCRIPTION OF THE PREFERRED EMBODIMENTS

In the following, the preferred embodiments of a

solid state image pickup device according to the present invention will be explained referring to the drawings. Fig. 1 shows a block diagram for explaining the solid state image pickup device according to the first embodiment. The solid state image pickup device is provided with a photoelectric converter portion 1 being composed of a plurality of pixels disposed in a row, a CCD-analog-shift-register 2 serving as a charge transfer portion, for transferring the charges generated in the photoelectric converter portion 1 with predetermined driving pulses,  $\Phi 1$  and  $\Phi 2$ , a timing pulse generator portion (not shown) for generating driving pulses  $\Phi 1$ ,  $\Phi 2$ , etc., and switch circuits SW1 and SW2 for switching the levels of the driving pulses  $\Phi 1$  and  $\Phi 2$  to be supplied to the CCD-analog-shift-register 2.

The solid state image pickup device is supplied with, besides driving pulses  $\Phi 1$  and  $\Phi 2$  a pulse signal ROG to be supplied to a readout-gate, a pulse signal  $\Phi_{LH}$  to be supplied to the last stage  $2n$  of the CCD-analog-shift-register 2, a pulse signal  $\Phi_{RS}$  to be supplied to a reset gate RG, and driving pulses  $\Phi 1'$  and  $\Phi 2'$ , having period different from that of the driving pulses  $\Phi 1$  and  $\Phi 2$ . The round marks shown in the drawings indicate terminals provided on a substrate.

In this place, switch circuits SW1 and SW2 will be



explained. In the following explanation, although a switch circuit SW1 is taken as an example, a switch circuit SW2 has the same constitution as that of the switch circuit SW1.

Figs. 2A and 2B show circuit diagrams for explaining the switch circuit. Fig. 2A shows a switch circuit for selecting a  $\Phi_{in}$  or a predetermined potential  $V_c$ , and Fig. 2B shows a switch circuit for selecting a  $\Phi_{in}$  or a floating level.

In an example shown in Fig. 2A, the switch circuit SW1 is composed of two MOS transistors TrA and TrB and an inverter. Fig. 3 shows a timing chart showing the relation between the switch pulse (SW pulse) and the  $\Phi_{in}$  or the  $\Phi_{out}$  in the switch circuit.

In the switch circuit SW1 shown in Fig. 2A, when a SW pulse is at a High level, the High level pulse is applied to the gate of the MOS transistor TrA as it is, and to the gate of the MOS transistor TrB, a Low level pulse obtained by reversing the High level pulse in the inverter is applied. As a result, the MOS transistor TrA becomes a closed state and the MOS transistor TrB becomes an opened state, accordingly,  $\Phi_{in}$  is output as it is as a  $\Phi_{out}$ .

On the contrary, when a SW pulse is at a Low level, the Low level pulse is applied to the gate of the MOS

transistor TrA as it is, and to the gate of the MOS transistor TrB, a High level pulse obtained by reversing the Low level pulse in the inverter is applied. As a result, the MOS transistor TrA becomes an opened state and the MOS transistor TrB becomes a closed state, accordingly, predetermined potential  $V_c$  to be applied to the source of the transistor TrB is output as a  $\Phi_{out}$ .

The switch circuit SW1 shown in Fig. 2B is composed of one MOS transistor Tr. In this switch circuit SW1, when a High level SW pulse is applied to the gate of the MOS transistor Tr, the MOS transistor Tr becomes a closed state and a  $\Phi_{in}$  is output as it is as a  $\Phi_{out}$ . When a Low level SW pulse is applied to the gate of the MOS transistor Tr, the MOS transistor Tr becomes an opened state and the  $\Phi_{in}$  is cut off and the  $\Phi_{out}$  becomes a floating level.

It is made possible to select the driving pulses  $\Phi_1$  and  $\Phi_2$  a predetermined voltage or a floating level to be supplied to the CCD-analog-shift-register 2 by providing the switch circuits SW1 and SW2 between the terminals of the driving pulses  $\Phi_1$  and  $\Phi_2$ , and the CCD-analog-shift-register 2 as shown in Fig. 1.

In other words, when the transfer of the charges is performed using the driving pulses  $\Phi_1$  and  $\Phi_2$ , the switch circuits SW1 and SW2 are kept in a closed state. Thereby,

driving pulses  $\Phi_1$  and  $\Phi_2$  can be applied to the CCD-analog-shift-register 2.

In short, the charge accumulated in each pixel S in the photoelectric converter portion 1 is transferred to the CCD-analog-shift-register 2 by the pulse ROG applied to the readout-gate, and the charge is transferred successively toward the left in the figure by the driving pulses  $\Phi_1$  and  $\Phi_2$ .

When a pulse signal  $\Phi_{LH}$  is applied to the last stage  $2n$ , the charge stored in each pixel is sent to a floating diffusion FD serving as a charge/voltage converter portion, and the charge in each pixel is converted into a voltage corresponding to the quantity of the charge stored therein. The converted voltage is output from the output terminal  $V_{out}$  through an output amplifier. The charges sent to the floating diffusion FD are discharged to a reset drain RD by the application of a pulse signal  $\Phi_{RS}$  to the reset gate RG.

In repeating the abovementioned operation, it is made possible to transfer the charge generated in each pixel and take out the output voltage corresponding to the quantity of the charge generated in each pixel.

On the other hand, in a case where a user does not want to use the  $\Phi_1$  and  $\Phi_2$  as driving pulses, the switch circuits SW1 and SW2 are kept in a opened state for a

desired arbitrary period of time. Thereby, the output of the switch circuit becomes a predetermined potential  $V_c$  or a floating level as shown in Figs. 2A and 2B, and for the desired period of time, the driving pulses  $\Phi 1'$  and  $\Phi 2'$  can be applied to the CCD-analog-shift-register 2.

In short, driving pulses  $\Phi 1'$  and  $\Phi 2'$  can be applied to the CCD-analog-shift-register 2 without being influenced by driving pulses  $\Phi 1$  and  $\Phi 2$ , and in the same way as the above case, it is possible to perform the transfer of the charge and obtain the output of the corresponding voltage.

As described in the above, in the solid state image pickup device according to the first embodiment, the switching of the potential of driving pulses can be easily performed by switching the circuits SW1 and SW2, and further in a case where other driving pulses  $\Phi 1'$  and  $\Phi 2'$  are used, the influence exerted by the driving pulses  $\Phi 1$  and  $\Phi 2$  can be eliminated. In addition, any change in the constitution of the timing pulse generator portion (not shown) for generating the driving pulses  $\Phi 1$  and  $\Phi 2$  is not needed, so that there is no need to design a new circuit.

In the first embodiment, an example has been explained, in which the switch circuits SW1 and SW2 are provided on the lines of the driving pulses  $\Phi 1$  and  $\Phi 2$ ,

for switching over the driving pulses  $\Phi_1$  and  $\Phi_2$  to a predetermined potential  $V_c$  or a floating level, however, it is also possible to provide switch circuits on other pulse lines for switching over the other driving pulses to the potential  $V_c$  or a floating level.

For example, when the switch circuits are provided on the line of the pulse ROG to be applied to the readout-gate, it becomes possible to perform readout at another timing. In the similar way, by providing the switch circuits on the line of the pulse  $\Phi_{LH}$ , the charge transfer in the floating diffusion FD can be performed at a yet another timing.

In the similar way, by providing the switch circuits on the line of the pulse  $\Phi_{RS}$ , the discharge of the charge can be performed at a still further timing. When the switch circuits are provided on the line of a sweeping-out-gate-pulse (shutter pulse), not shown in a drawing, the sweeping out of the charge can be performed at an additional timing.

Next, a second embodiment will be explained referring to Fig. 4. A solid state image pickup device according to the second embodiment comprises a plurality of photoelectric converter portions 1b, 1g, 1r and 1w, each being composed of a plurality of pixels in a row, a plurality of CCD-analog-shift-registers 2b, 2g, 2r and 2w,

for transferring the charges generated in respective photoelectric converter portions 1b, 1g, 1r and 1w, timing pulse generator portions (not shown) for generating driving pulses  $\Phi 1$  and  $\Phi 2$ , etc. and switch circuits SW1 and SW2, for switching the levels of the driving pulses  $\Phi 1$  and  $\Phi 2$ .

The photoelectric converter portion 1b is composed of a plurality of pixels in a row Sb coated with blue filters (not shown) and obtains the charges corresponding to the blue color. The photoelectric converter portion 1g is composed of a plurality of pixels in a row Sg coated with green filters (not shown) and obtains the charges corresponding to the green color. Further, the photoelectric converter portion 1r is composed of a plurality of pixels in a row Sr coated with red filters (not shown) and obtains the charges corresponding to red color. The photoelectric converter portion 1w is composed of a plurality of pixels in a row with no color filter coated thereon and it transfers charges as a black and white sensor.

In the solid state image pickup device described as above, the line of the driving pulses  $\Phi 1$  and  $\Phi 2$  is branched to two lines: one is the line to supply pulses to the CCD-analog-shift-registers 2b, 2g and 2r, corresponding to blue, green and red, and the other is

the line to supply pulses to the CCD-analog-shift-register 2w corresponding to the black and white sensor. The switch circuits SW1 and SW2 are provided only on the line of the driving pulses  $\Phi 1$  and  $\Phi 2$  for supplying pulses to the CCD-analog-shift-registers 2b, 2g and 2r, corresponding blue, green and red respectively. The constitution of these switch circuits SW1 and SW2 are identical to those explained in the first embodiment (refer to Figs. 2A, 2B and 3.)

In a case where color sensors (photoelectric converter portions, 1b, 1g and 1r, corresponding to blue, green and red) of comparatively low operating frequency are used, (normally, the output frequency of blue, green or red is in the range of 1 MHz to 5 MHz.), the switch circuits SW1 and SW2 are kept in a closed state. Thereby, the driving pulses  $\Phi 1$  and  $\Phi 2$  are applied to all CCD-analog-shift-registers 2b, 2g, 2r and 2w.

In short, in this case, the total load of all CCD-analog-shift-registers 2b, 2g, 2r and 2w becomes the load capacity of the driving pulses, however, in the case of the transfer of the charges using color sensors, since the operating frequency of these is comparatively low as described in the above, the shift registers are able to correspond well enough.

In other words, the charges accumulated in

respective pixels Sb, Sg, Sr and Sw in the photoelectric converter portions 1b, 1g, 1r and 1w, respectively, are transferred to the respective CCD-analog-shift-registers 2b, 2g, 2r and 2w by the ROG pulses applied to the readout-gate, and they are transferred successively toward the left in the drawing by the driving pulses  $\Phi_1$  and  $\Phi_2$ .

When the pulse  $\Phi_{LH}$  is applied to the last stage 2n, the charge generated in every pixel corresponding to every color is sent to the floating diffusion FD serving as the charge/voltage converter portion, and each of them is converted into a voltage corresponding to the quantity of the charge. These voltages are output from output terminals, Vout-B, Vout-G, Vout-R and Vout-w, through respective output amplifiers. The charges sent to the floating diffusion FD are discharged to the reset drain RD by the application of a pulse  $\Phi_{RS}$  to the reset gate RG. When the output for a color picture is to be obtained, the signal corresponding to black and white output from the output terminal Vout-w is not used.

By the repetition of the above operation, it is made possible to transfer the charge generated in each pixel and take out the output voltage corresponding to each color.

On the other hand, when the black and white sensor



(photoelectric converter portion 1w) is used aiming at high speed transfer (normally equal to or higher than 5 MHz), the switch circuits SW1 and SW2 are kept in a opened state. Thereby, the driving pulses  $\Phi 1$  and  $\Phi 2$  are not applied to the CCD-analog-shift-registers 2b, 2g and 2r corresponding to color sensors, and the voltage to be applied to it becomes a predetermined voltage  $V_c$  (refer to Fig. 2.) or a floating level, and the driving pulses  $\Phi 1$  and  $\Phi 2$  are applied only to the CCD-analog-shift-register 2w.

In short, in this case, only the load of the CCD-analog-shift-register 2w corresponding to black and white becomes the load capacity of the driving pulses, so that the shift register is able to correspond well enough to the transfer of the charges for black and white aiming at the high speed transfer.

In other words, the charges accumulated in respective pixels Sb, Sg, Sr and Sw in the photoelectric converter portions 1b, 1g, 1r and 1w are transferred to the CCD-analog-shift-registers 2b, 2g, 2r and 2w, respectively, by the pulse ROG applied to the readout-gates. However, only the charges transferred to the CCD-analog-shift-register 2w, to which the driving pulses  $\Phi 1$  and  $\Phi 2$  are applied, are transferred successively toward the left in the drawing.

When the pulse  $\Phi_{LH}$  is applied to the last stage  $2n$ , the charge in every pixel corresponding to black and white is transferred to the floating diffusion FD, serving as a charge/voltage converter portion, and the charge is converted into a voltage corresponding to the quantity of the charge of black and white by the floating diffusion FD. The voltage is output from the output terminal Vout-w through an output amplifier. The charges sent to the floating diffusion FD are discharged to the reset drain RD by the application of a pulse  $\Phi_{RS}$  to the reset gate RG.

In repeating the operation mentioned in the above, the charge generated in every pixel corresponding to black and white can be transferred to the CCD-analog-shift-register  $2w$  and the output voltage can be taken out from it. In short, a signal corresponding to black and white can be obtained at a high speed.

In the abovementioned second embodiment, a device being provided with four photoelectric converter portions 1b, 1g, 1r and 1w, and four CCD-analog-shift-registers 2b, 2g, 2r and 2w each corresponding to blue, green, red and white was explained, however, the present invention is not limited to the above, and the invention can be applied to a device being provided with other number of photoelectric converter portions.

For example, in a case where a user wants to obtain a color picture with a device being provided with three photoelectronic converter portions and CCD-analog-shift-registers corresponding to blue, green, and red, driving pulses are supplied to all these CCD-analog-shift-registers, and when he/she wants to obtain a black and white picture, for example, a switch circuit is so constituted that the driving pulses are supplied only to a CCD-analog-shift-register corresponding to, for example, green. Thereby, with a device being provided with only color sensors, a color picture can be naturally obtained and also pictures of black and white can be obtained at a high speed.

As many apparently widely different embodiments of this invention may be made without departing from the spirit and scope thereof, it is to be understood that the invention is not limited to the specific embodiments thereof except as defined in the appended claims.

WHAT IS CLAIMED IS:

1. A solid state image pickup device being provided with a photoelectric converter portion being composed of a plurality of pixels disposed in a row, a charge transfer portion for transferring the charges generated in said photoelectric converter portion and a charge/voltage converter portion for converting the charges transferred by said charge transfer portion into voltages comprising:

a timing pulse generator portion for generating at least more than one pulse signal from among four pulse signals which are; a first pulse signal for driving said charge transfer portion, a second pulse signal for reading out the charges generated in said photoelectric converter portion, a third pulse signal for sweeping out the charges generated in said photoelectric converter portion, and a fourth pulse signal for discharging the charges transferred to said charge/voltage converter portion, and

a switch circuit for switching over at least one pulse signal out of said pulse signals of more than one to a predetermined fixed potential or a floating level.

2. A method for driving a solid state image pickup device being provided with a photoelectric converter portion being composed of a plurality of pixels in a row,

a charge transfer portion for transferring the charges generated in said photoelectric converter portion and a charge/voltage converter portion for converting the charges transferred by said charge transfer portion into voltages, wherein

in a first mode, a first pulse signal for driving said charge transfer portion, a second pulse signal for reading out the charges generated in said photoelectric converter portion, a third pulse signal for sweeping out the charges generated in said photoelectric converter portion, and a fourth pulse signal for discharging the charges transferred to said charge/voltage converter portion are supplied to said solid state image pickup device,

in a second mode, at least one pulse signal out of the first, the second, the third and the fourth pulse signals is changed over to a predetermined fixed potential or a floating level.

3. A method for driving a solid state image pickup device being provided with a plurality of photoelectric converter portions being composed of a plurality of pixels in a row, and a plurality of charge transfer portions for transferring the charges generated in respective rows of pixels in the plurality of photoelectric converter portions, wherein

in a first mode, driving pulses are supplied to all charge transfer portions, and in a second mode, driving pulses to be supplied to at least one of said plurality of charge transfer portions are switched over to a predetermined fixed potential or a floating level.

# ABSTRACT OF THE DISCLOSURE

A solid state image pickup device being provided with a photoelectric converter portion being composed of a plurality of pixels disposed in a row, a charge transfer portion for transferring the charges generated in the photoelectric converter portion, and a charge/voltage converter portion for converting the charges transferred by the charge transfer portion into voltages, comprising; a timing pulse generator portion for generating at least more than one pulse signal from among the followings: a first pulse signal for driving the charge transfer portion, a second pulse signal for reading out the charges generated in the photoelectric converter portion, a third pulse signal for sweeping out the charges generated in the photoelectric converter portion and a fourth pulse signal for discharging the charges transferred to the charge/voltage converter portion, and a switch circuit for switching over at least one pulse signal out of the abovementioned pulse signals to a predetermined fixed potential or a floating level.





FIG. 2A

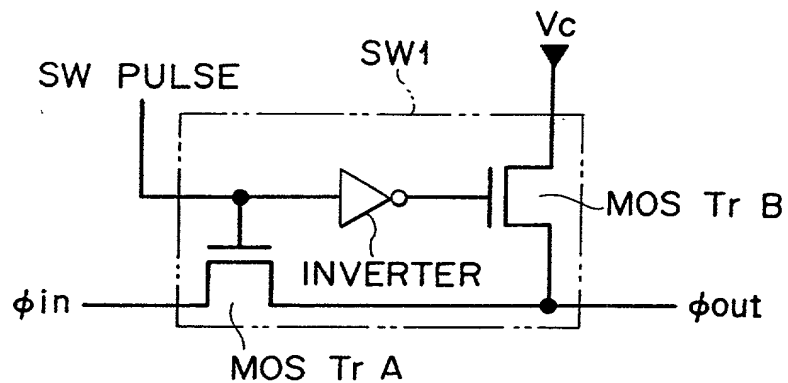


FIG. 2B



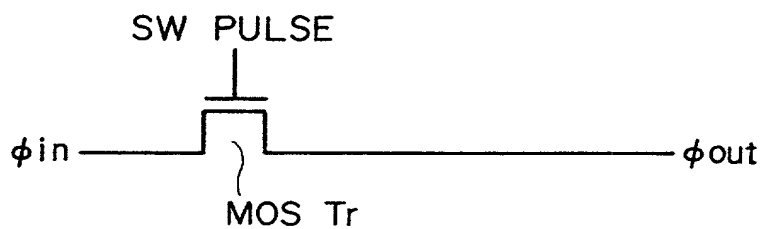


FIG. 3

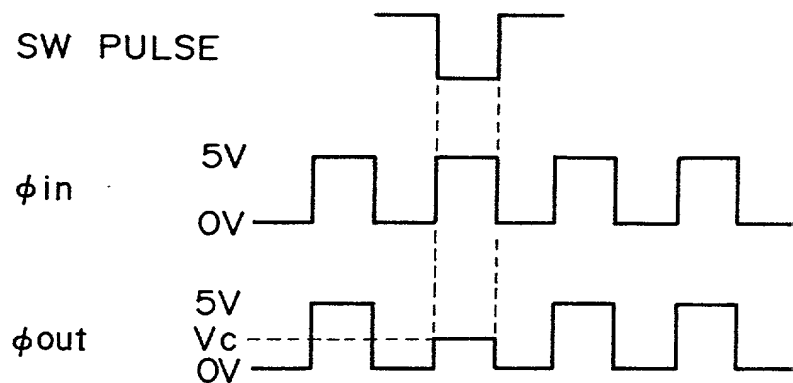

# FIG. 4

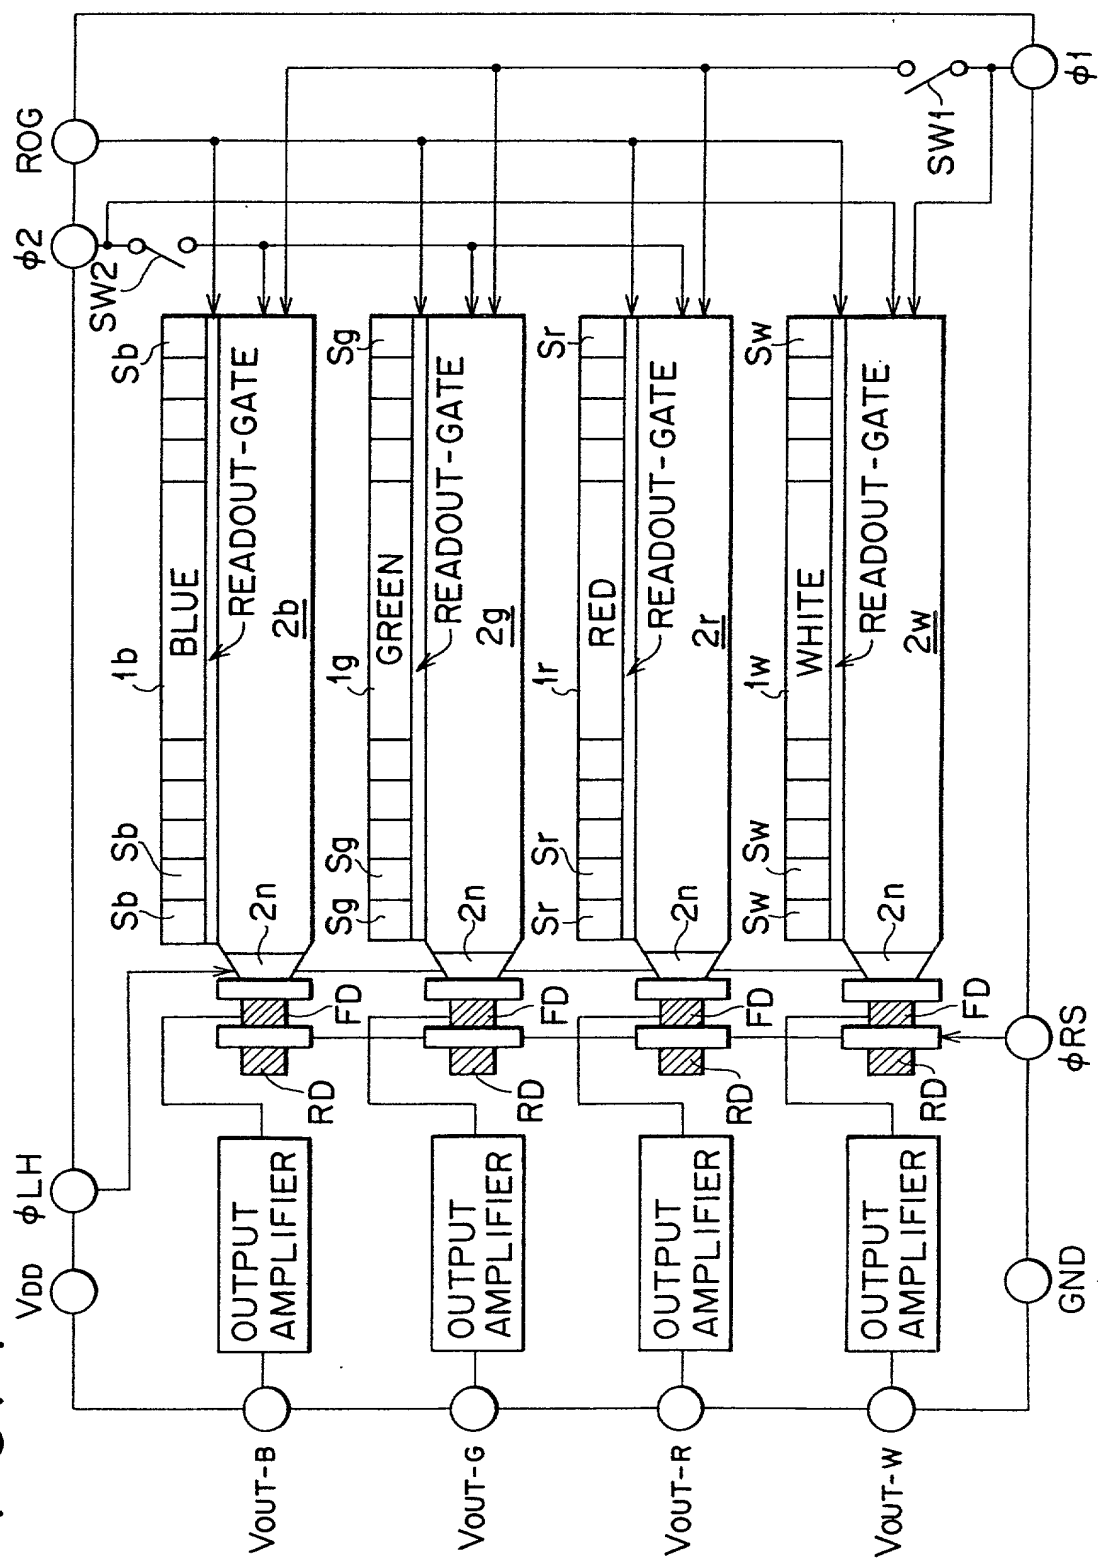

## DECLARATION AND POWER OF ATTORNEY

As a below named inventor, I hereby declare that:

My residence, post office address and citizenship are as stated below next to my name,

I believe I am the original, first and sole inventor (if only one name is listed below) or an original, first and joint inventor (if plural names are listed below) of the subject matter which is claimed and for which a patent is sought on the invention entitled:

## SOLID STATE IMAGE PICKUP DEVICE

Case No. P99,0372, the specification of which

(check one) ☒ is attached hereto.  
☐ was filed on \_\_\_\_\_, as  
 Application Serial No. \_\_\_\_\_  
 and was amended on \_\_\_\_\_  
 (if applicable)

I hereby state that I have reviewed and understand the contents of the above identified specification, including the claims as amended by any amendment referred to above.

I acknowledge the duty to disclose to the United States Patent Office all information which is known to me to be material to the patentability of this application in accordance with Title 37, Code of Federal Regulations, 1.56(a).<sup>1</sup>

I do not know and do not believe this invention was ever known or used in the United States of America before my or our invention thereof, or patented or described in any printed publication in any country before my or our invention thereof or more than one year prior to this application, that the same was not in public use or on sale in the United States of America more than one year prior to this application, and I believe that the invention has not been patented or made the subject of an inventor's certificate issued before the date of this application in any country foreign to the United States of America on an application filed by me or my legal representatives or assigns more than twelve months prior to this application, and that no application for patent or inventor's certificate on this invention has been filed in any country foreign to the United States of America prior to this application by me or my legal representatives or assigns, except as identified below:

I hereby claim foreign priority benefits under Title 35, United States Code, 119 of any foreign application(s) for patent or inventor's certificate listed below

Prior Foreign Application(s)

Number

Country

Date

P10-128370

Japan

May 12, 1998

<sup>1</sup> (b) Under this section, information is material to patentability when it is not cumulative to information already of record or being made of record in the application, and

(1) It establishes, by itself or in combination with other information, a prima facie case of unpatentability of a claim; or

(2) It refutes, or is inconsistent with, a position the applicant takes in:

(i) Opposing an argument of unpatentability relied on by the Office, or

(ii) Asserting an argument of patentability.

A prima facie case of unpatentability is established when the information compels a conclusion that a claim is unpatentable under the preponderance of evidence, burden-of-proof standard, giving each term in the claim its broadest reasonable construction consistent with the specification, and before any consideration is given to evidence which may be submitted in an attempt to establish a contrary conclusion of patentability.

and have also identified below any foreign application for patent or inventor's certificate having a filing date before that of the above listed application on which priority is claimed:

Prior Foreign Application(s)

Number Country Date

If no priority is claimed, I have identified all foreign patent applications filed prior to this application:

Prior Foreign Application(s)

Number Country Date

And I hereby appoint Messrs. John D. Simpson (Registration No. 19,842), Lewis T. Steadman (17,074), Dennis A. Gross (24,410), Steven H. Noll (28,982), Thomas I. Ross (29,275), Kevin W. Gynn (29,927), Robert M. Barrett, (30,142), Robert M. Ward (26,517), Brett A. Valiquet (27,841), Edward A. Lehman (22,312), James D. Hobart (24,149), Marvin Moody (16,549), Melvin A. Robinson (31,870), David R. Metzger (32,919), John R. Garrett (27,888), James Van Santen (16,584), William C. Stueber (16,453), and J. Arthur Gross (13,615) all members of the firm of Hill, Steadman & Simpson, A Professional Corporation  
Telephone: 312/876-0200 Ext. \_\_\_\_\_

my attorneys with full power of substitution and revocation, to prosecute this application and to transact all business in the Patent and Trademark Office connected therewith and direct that all correspondence be forwarded to:

Hill, Steadman & Simpson  
A Professional Corporation  
85th Floor Sears Tower, Chicago, Illinois 60606

I hereby declare that all statements made herein of my own knowledge are true and that all statements made on information and belief are believed to be true; and further that these statements were made with the knowledge that willful false statements and the like so made are punishable by fine or imprisonment, or both, under Section 1001 of Title 18 of the United States Code and that such willful false statements may jeopardize the validity of the application or any patent issued thereon.

Full name of sole or first inventor YOSHINORI KUNO

Inventor's signature Yoshinori Kuno Date April 22, 1999  
Residence KANAGAWA, JAPAN  
Citizenship JAPANESE  
Post Office Address c/o SONY CORPORATION 7-35, KITASHINAGAWA  
6-CHOME, SHINAGAWA-KU, TOKYO, JAPAN

Full name of second joint inventor,

(if any) MASAHIDE HIRAMA

Inventor's signature Masahide Hirama Date April 22, 1999  
Residence KANAGAWA, JAPAN  
Citizenship JAPANESE  
Post Office Address c/o SONY CORPORATION 7-35, KITASHINAGAWA  
6-CHOME, SHINAGAWA-KU, TOKYO, JAPAN

Full name of third joint inventor,

(if any) TOSHIMITSU NAGAE

Inventor's signature Toshimitsu Nagae Date April 22, 1999  
Residence KANAGAWA, JAPAN  
Citizenship JAPANESE  
Post Office Address c/o SONY CORPORATION 7-35, KITASHINAGAWA  
6-CHOME, SHINAGAWA-KU, TOKYO, JAPAN